


LED Intelligent CT Driver (constant voltage)

- Dimming interface: 0-10V(1-10V/10V PWM/RX), Push DIM/CCT
- Dimming interface with photoelectric isolation, in line with the latest safety standards, more safe and reliable.
- 0-10V DIM and color temperature adjusting driver, 2 independently SELV constant voltage output channels.
- Constant power design, adjust different color temperature to keep the same brightness.
- Dimming range from 0-100%, LED start at 0.1% possible.
- With soft-on and fade in function, visual more comfortable.
- Color temperature adjusting range: 2700-6500K
- Automatic recognition of 0-10V, 1-10V input signal.
- 0-100% flicker-free, High frequency exemption level.
- High efficient driver: efficiency 93%, PF>0.98, THD<6%.
- In line with the EU energy efficiency ERP directive, standby power consumption < 0.5W
- Innovative thermal management technology, intelligent power life protection.
- Over-heat / Over voltage / Over load / Short circuit protection, recover automatically.
- Fully-protected plastic housing with design of dismantlable end cover.
- Suitable for indoor I/II/III type lamps application.
- 5 years warranty (Rubycon capacitor).

Flicker-free
IEEE 1789
Achieve the exemption level.

Dimmable:
0.1%-100%

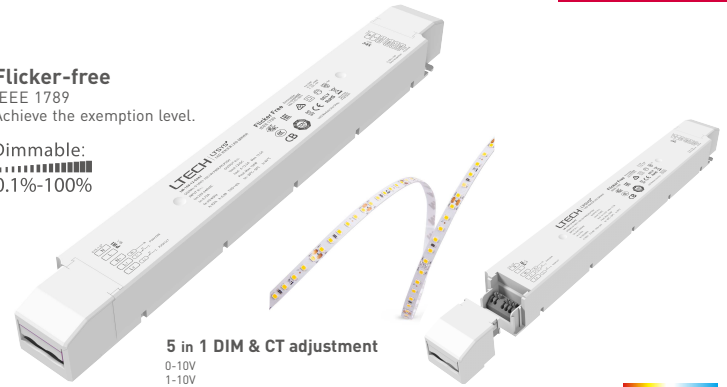

5 in 1 DIM & CT adjustment

0-10V
1-10V
10V PWM
RX
Push
Ultra-low consumption of 0-10V ports: < 0.05mA.

DIM & CT adjustment



SELV Class 2
RoHS



(The certification icon represents undergoing certification applications only, and final certification qualification subject to actual product.)




Specification

Model		LM-150-24-G2A2	LM-150-12-G2A2
OUTPUT	Output Voltage	24Vdc	12Vdc
	Output Voltage Range	24Vdc ± 0.5Vdc	12Vdc ±0.5Vdc
	Output Current	Max. 6.25A	Max. 12.5A
	Output Power	Max. 150W	
	Output Power Range	0-150W	
	Strobe Level	High frequency exemption level.	
	PWM Frequency	3600Hz	
	Dimming Range	0-100%, dimming depth: Max. 0.1%	
	Overload Power Limitation	≥102%	
	Ripple & Noise	Switch ripple ≤200mV, noise ≤500mV	Switch ripple ≤200mV, noise ≤800mV
INPUT	Dimming Interface	0-10V(1-10V/10V PWM/RX) DIM/CCT, Push DIM/CCT	
	Interface consumption	<0.05mA @ 0-10V	
	Input Voltage	220-240Vac	200-280Vdc
	Frequency	50/60Hz	
	Input Current	Max. 0.75A/230Vac	
	Power Factor	PF>0.98/230Vac, at full load	
	THD	<6% at 230Vac, at full load	
	Efficiency (typ.)	93%	92%
	Standby Power Loss	<0.5W	
	Inrush Current(typ.)	Cold start 45A at 230Vac	
	Control surge capability	L-N:2KV	
Leakage Current	Max. 0.5mA		
ENVIRONMENT	Working Temperature	ta: -20°C ~ 50°C tc: 85°C	
	Working Humidity	20 ~ 95%RH, non-condensing	
	Storage Temp., Humidity	-40°C ~ 80°C, 10-95%RH	
	Temp. Coefficient	±0.03%/°C [0-50°C]	
	Vibration	10-500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.	
PROTECTION	Over-heat Protection	Intelligently adjusting or turning off the output current if the PCB temperature ≥110°C, auto recovers.	
	Over Voltage Protection	Shut down the output when non-load voltage ≥28V, re-power on to recover after fault condition is removed.	Shut down the output when non-load voltage ≥16V, re-power on to recover after fault condition is removed.
	Over Load Protection	Shut down the output when current load ≥102%, auto recovers.	
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, auto recovers.	
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac	
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH	
	Safety Standards	IEC/EN61347-1, IEC/EN61347-2-13	
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11 EN61547	
	Strobe Test Standard	IEEE 1789	
OTHERS	Dimension	352×43×30mm(L×W×H)	
	Packing	355×44×33mm(L×W×H)	
	Weight(G.W.)	430g±10g	

* The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), then we can prepare the special programs.

Dimensions


Unit: mm

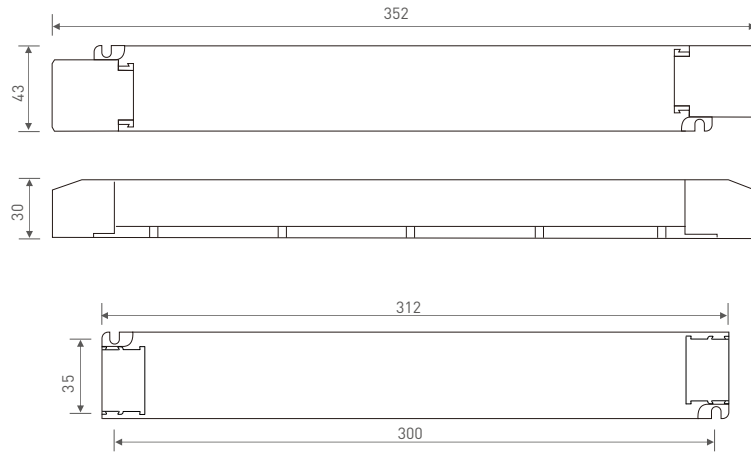


Wiring Diagram

0-10V Connection


1. Brightness adjustment.

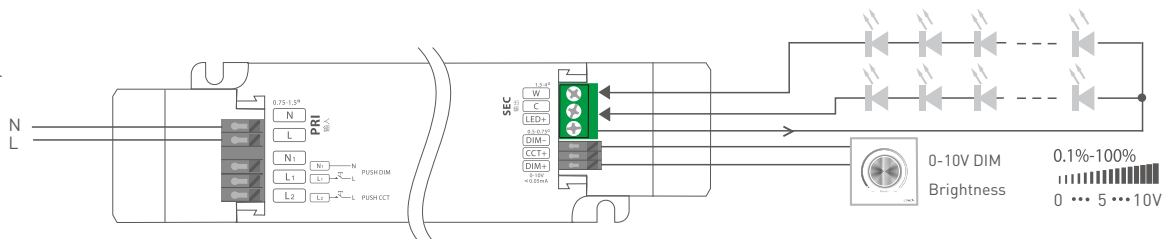


2. Color temperature adjustment.

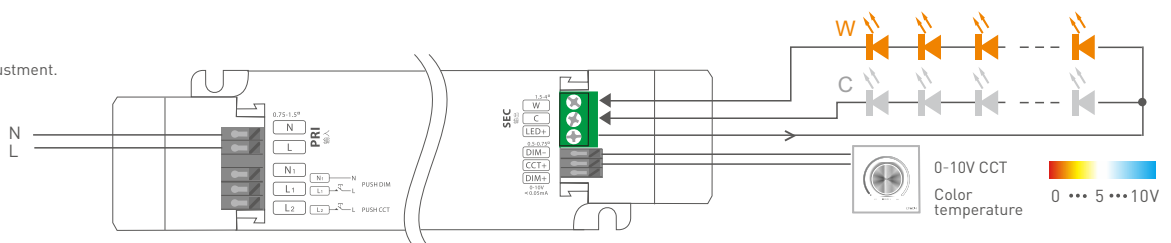

3. Brightness and color temperature adjustment respective.

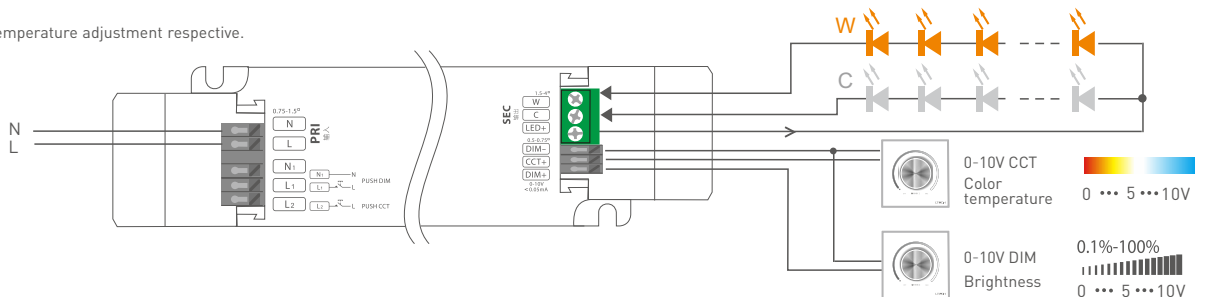


4. Brightness and color temperature adjustment simultaneous.

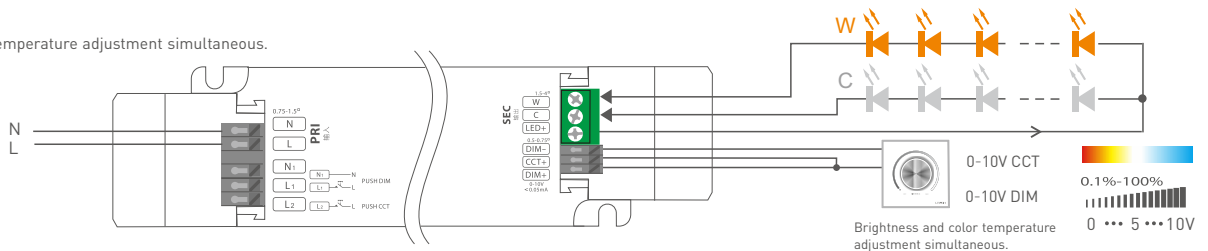


Push DIM/CCT Connection


1. Brightness adjustment.

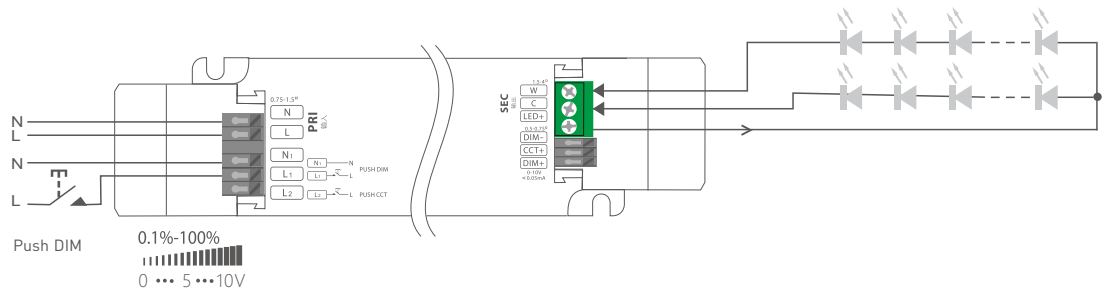


2. Color temperature adjustment.

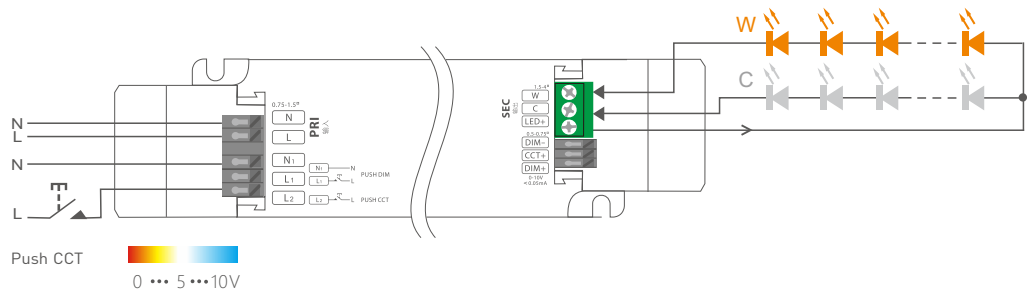


3. Brightness and color temperature adjustment respective.

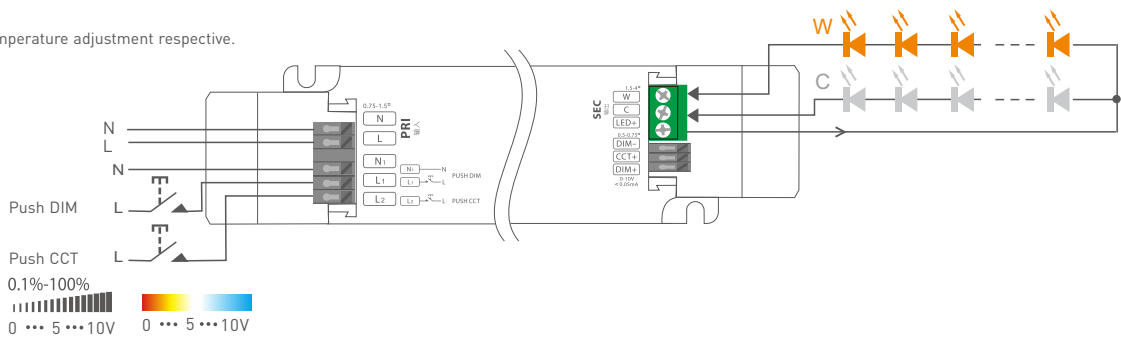


4. Brightness and color temperature adjustment simultaneous.

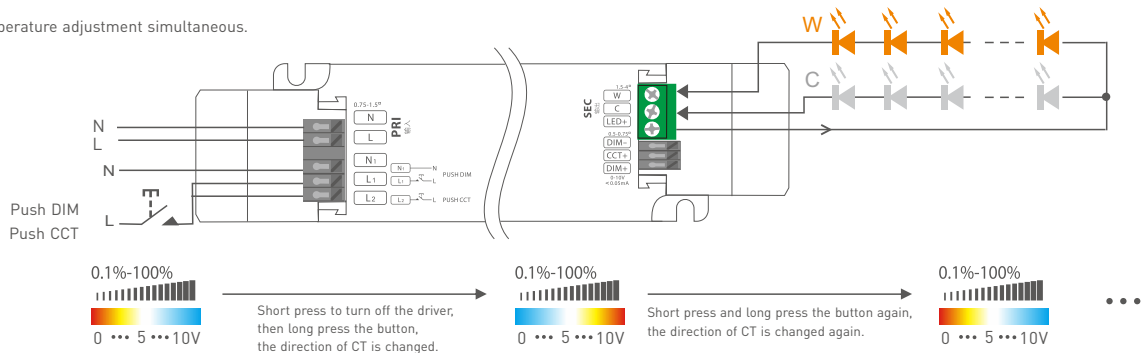

* Dimming interface priority: First 0-10V, next Push DIM/CCT.



* Adopting constant power program design, it keeps the same brightness in color temperature dimming, twice the rated power load can be connected.
150W driver, 150W X 2CH load can be connected, the total power of the 2 channels will be kept in 150W.



Push DIM/CCT



Reset switch

DIM

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the brightness goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning on again.

CCT

- Color temperature adjustment: Long press
- With every other long press, color temperature go to the opposite direction.
- Color temperature memory: Color temperature will be the same as previously adjusted when turning on again.

* Applicable to brightness adjustment, color temperature adjustment and brightness/CT adjustment respective of Push DIM/CCT connection.



Reset switch


DIM/CCT

- On/off control: Short press.
- Stepless dimming and color adjustment: long press
- With every other long press, color temperature go to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning on again.


* Applicable to brightness and CT adjustment simultaneous of Push DIM/CCT connection.

Application of Protective Cover

Wire pressing board:




Push the wire pressing board to fix the wire.



Push outward the side plate, meanwhile use the tool to uninstall the wire pressing board.


Uninstall protective cover:

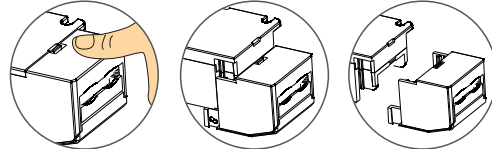


Break off the bottom left and right to remove the protective cover.

Relationship Diagrams


Efficiency vs Load

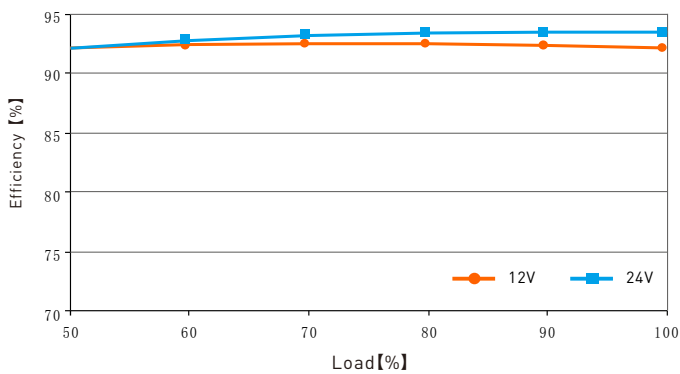

Power Factor Characteristic

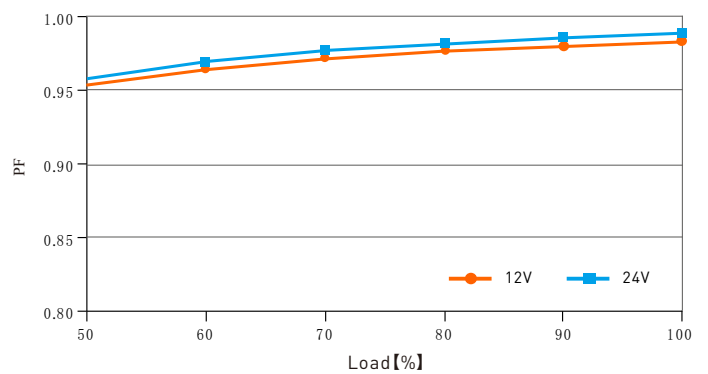

THD vs Load

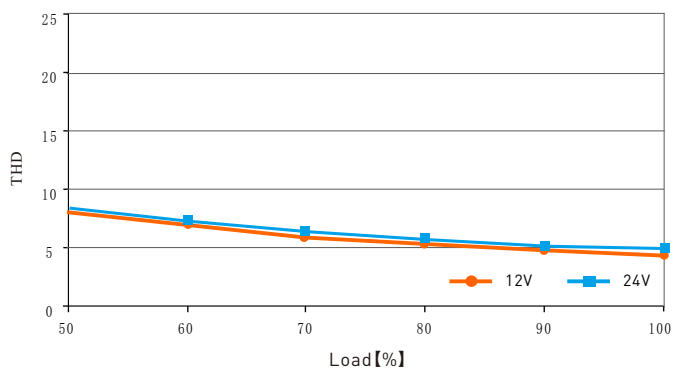

Flicker Test Form

IEEE 1789

Limit of Modulation in low risk area	
Waveform frequency of Optical output	limit (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit of Modulation in no effect area	
Waveform frequency of Optical output	limit (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$[0.08/2.5] \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1%
- ◆ 1%
- ▲ 5%
- ◆ 10%
- 20%
- ▲ 30%
- 40%
- ★ 50%
- 60%
- 70%
- ☆ 80%
- ◆ 90%
- ◆ 100%

