

DIN-Rail 1-10V LED Dimming Driver

0-144...288W 12A 12-24Vdc


- Dimming interface: 0 -10V ,1 -10V ,10V PWM or push button
- PWM digital dimming, no alter LED color rendering index.
- Dimming range from 0-100%, LED start at 0.1% possible.
- Max. current output: 12A.
- Short circuit / Over load protection.
- Full protective plastic housing.
- Suitable for indoor environments.




Main Characteristics


Dimming Interface:	0-10V ,1-10V ,10V PWM or push button	Mounting:	DIN-Rail or Screw
Input Voltage:	12-24Vdc	Working Temperature:	-30°C-55°C
Output Voltage:	12-24Vdc	Product Size:	L112×W35×H67(mm)
Output Current:	12A×1CH	Package Size:	L114×W37×H70(mm)
Max. Output Power:	0-144W...288W	Weight(G.W.):	125g
Dimming Range:	0-100%, LED start at 0.1% possible.		

Dimensions

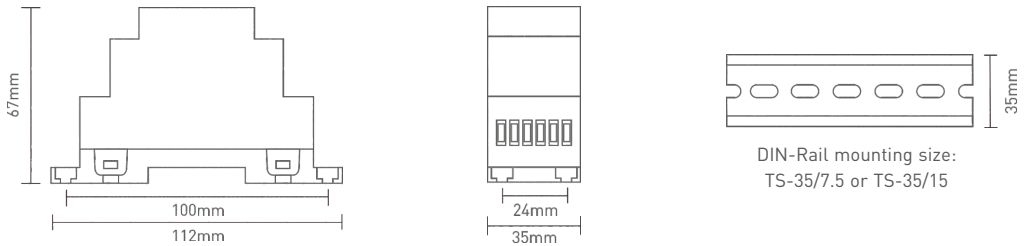


System Connection Diagram:

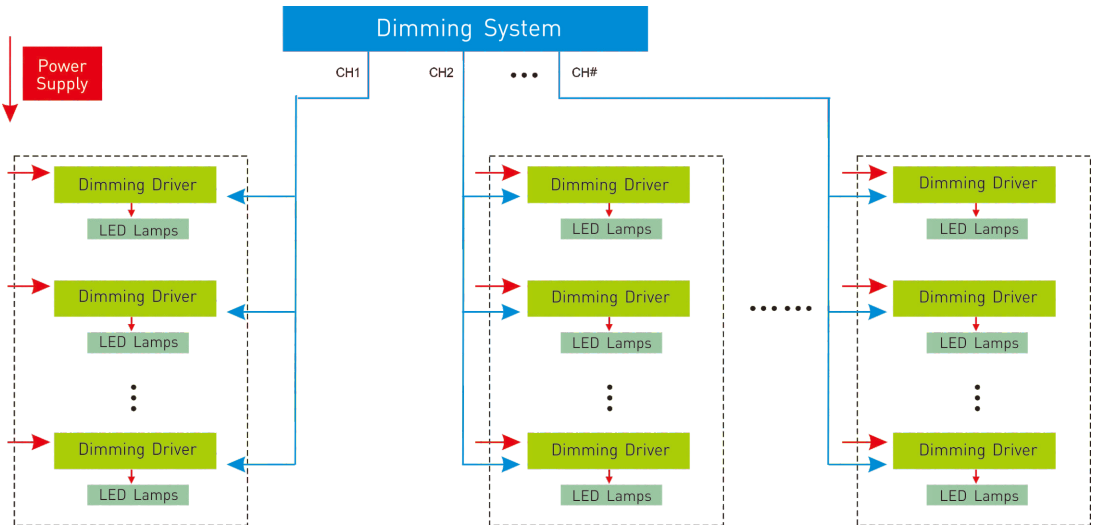

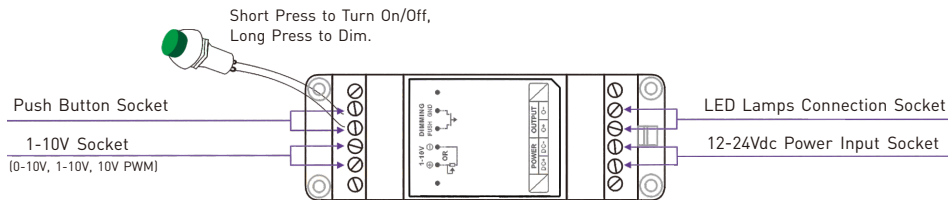

12V lamp connected, loads 0~144W(12V).

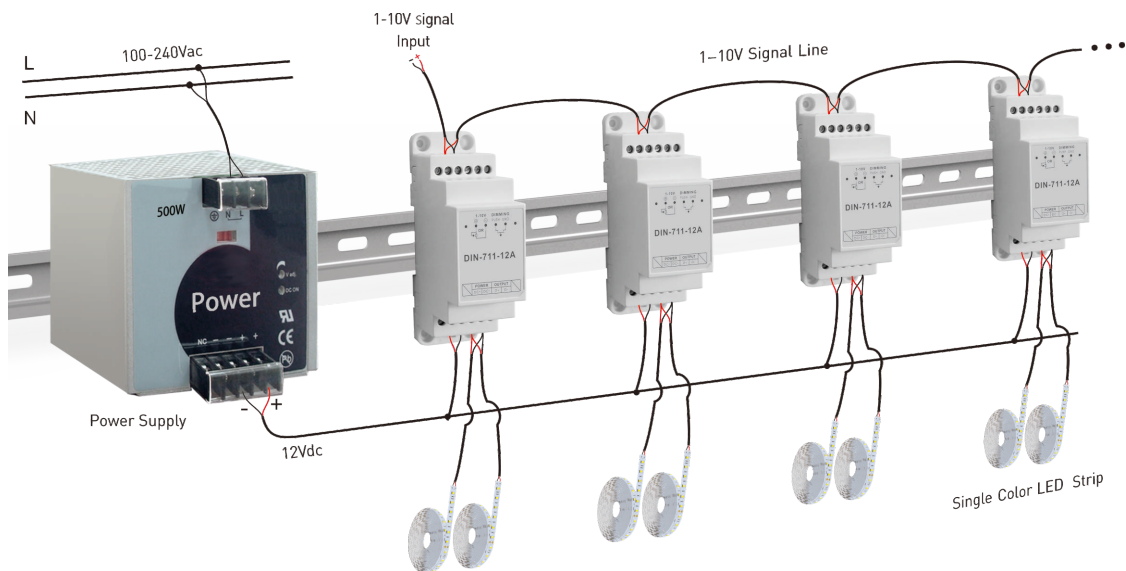

24V lamp connected, loads 0~288W(24V).

