

Intelligent LED Driver(Constant Current & Programmable)

- The output programming is adjustable and the output voltage is automatically adapted.
- With soft-on and fade-in dimming function enhancing visual comfort.
- T-PWM™ dimming technology allows continuous and flicker-free images under high-speed shooting.
- 0-100% flicker-free dimming with high frequency exemption level.
- Dimming from 0-100%, down to 0.1%.
- Automatically recognize 0-10V and 1-10V input signals.
- Ultra-low consumption of 0-10V ports < 0.05mA.
- Energy-efficient driver: Efficiency 89%, PF>0.9, THD<10%.
- Comply with the EU's ErP Directive, stand-by power consumption <0.5W.
- Innovative thermal management technology protects the power life intelligently.
- Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for indoor light applications of I / II / III type.
- Up to 50,000-hour life time.
- 5-year warranty (Rubycon capacitor).

5 in 1 dimming

0-10V
1-10V
10V PWM
RX
Push DIM

T-PWM™

Super depth dimming technology

Flicker-free

IEEE 1789
Achieve high frequency exemption level.

Dimmable:
0.1%-100%



The certification icon represents on-going certification applications only, and final certification qualification is subject to actual products.




Technical Specs


| Model | LU-75-500-1750-U1A2 | | | |
|----------------------|-----------------------------------|--|----------------|-----------------------------------|
| OUTPUT | Output Voltage | 58Vdc (Max) | | |
| | Output Voltage Range | 10-54Vdc | | |
| | Output Current | Max. 1.75A | | |
| | Output Power | Max. 75W | | |
| | Output Power Range | 5-75W | | |
| | Strobe Level | High frequency exemption level | | |
| | PWM Frequency | ≤3600Hz | | |
| | Dimming Range | 0-100%, down to 0.1% | | |
| | Overload Power Limitation | ≥102% | | |
| Ripple & Noise | Switch ripple≤200mV, noise≤800mV | | | |
| INPUT | Dimming Interface | 0-10V(1-10V/10V PWM/RX), Push DIM | | |
| | Input Voltage | 100-240/277Vac (277Vac for North America only) | | |
| | Frequency | 50/60Hz | | |
| | Input Current | Max. 0.9A/115Vac; Max. 0.45A/230Vac; Max. 0.35A/277Vac | | |
| | Power Factor | PF>0.97/115Vac; PF>0.95/230Vac; PF>0.9/277Vac | | |
| | THD | 115Vac@THD<6%; 230Vac@THD<10%; 277Vac@THD<10% | | |
| | Efficiency (typ.) | 89% | | |
| | Standby Power Loss | <0.5W | | |
| | Inrush Current | Cold start 50A/230Vac | | |
| | Anti Surge | L-N: 2KV | | |
| Leakage Current | Max. 0.7mA | | | |
| ENVIRONMENT | Working Temperature | ta: -20-50°C tc: 85°C | | |
| | Working Humidity | 20 ~ 95%RH, non-condensing | | |
| | Storage Temperature, Humidity | -40-80°C, 10-95%RH | | |
| | Temperature Coefficient | ±0.03%/°C(-20-50°C) | | |
| | Vibration | 10-500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively | | |
| PROTECTION | Overheat Protection | Intelligently adjust or turn off the output current if the PCB temperature ≥110°C, and recover automatically | | |
| | Overvoltage protection | Shut down the output when non-load voltage>58V, and recover automatically | | |
| | Overload protection | Shut down the output when current load>102%, and recover automatically | | |
| | Short circuit protection | Enter hiccup mode if short circuit occurs, and recover automatically | | |
| SAFETY & EMC | Withstand Voltage | I/P-O/P: 3750Vac | | |
| | Isolation Resistance | I/P-O/P: 100MΩ/500Vdc/25°C/70%RH | | |
| | Safety Standards | UL | America | UL8750 |
| | | CUL | Canada | CSA C22.2 No. 250. 13 |
| | | CE | European Union | EN61347-1, EN61347-2-13 |
| | EMC Emission | FCC | America | FCC part 15 |
| | | CE | European Union | EN55015, EN61000-3-2, EN61000-3-3 |
| EMC Immunity | EN61000-4-2,3,4,5,6,8,11, EN61547 | | | |
| Strobe Test Standard | IEEE 1789 | | | |
| OTHERS | Dimensions | 355×31×21mm(L×W×H) | | |
| | Package size | 406×33×23mm(L×W×H) | | |
| | Gross weight(G.W) | 330g±10g | | |

Product Size

Unit: mm

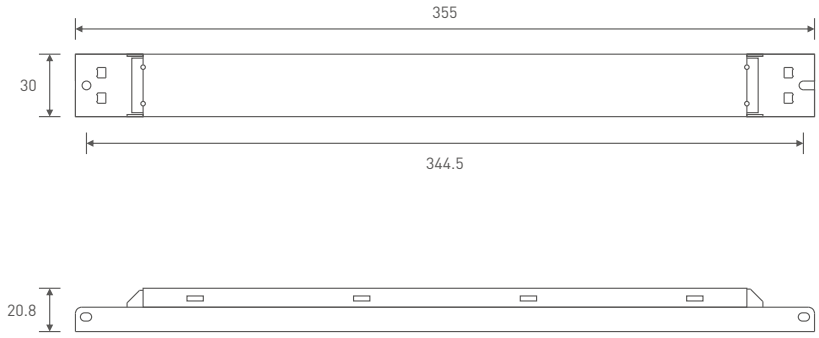

Wiring Diagram

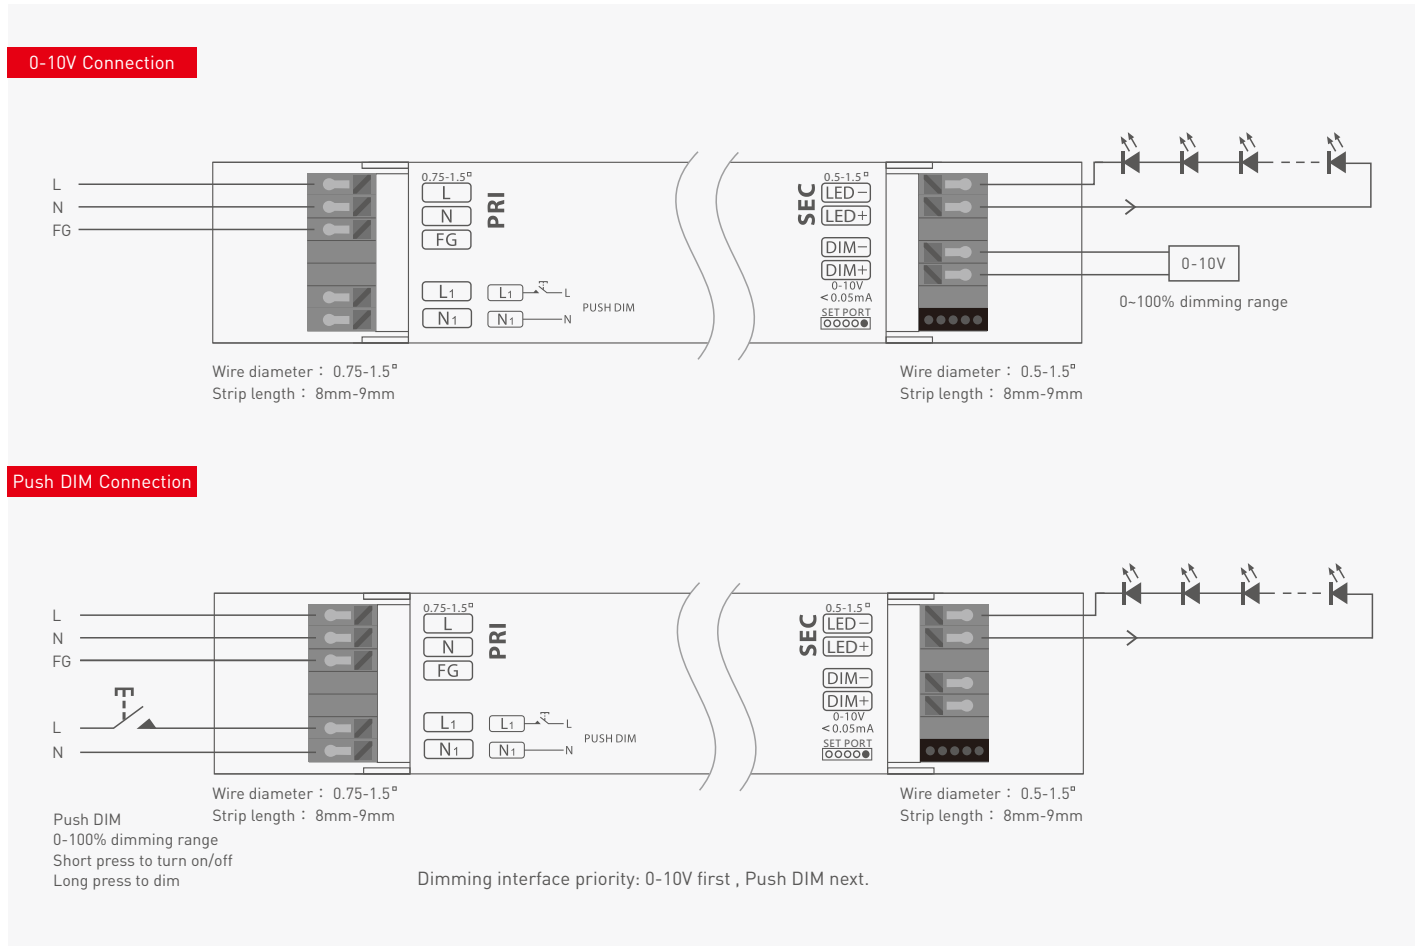

Push DIM



Reset switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the brightness level goes to the opposite direction.
- Dimming memory: Go to the brightness level adjusted previously when lights are turned on.
- * Switch on and off within 10 seconds, it will not have the same gradual effect as normal boot, but directly to the most bright level.


Parameter Range

| Model | Power(W) | Output Voltage Range(V) | Adjustable range of output current(mA) | Adjustable range of full power output(mA) | Factory Settings |
|---------------------|----------|-------------------------|--|---|------------------|
| LU-75-500-1750-U1A2 | 75W | 10-54Vac | 500-1750mA | 1380-1750mA | 500mA |

Work with the ISET Programmer (Model LT-ISET)

LT-ISET is an editor for changing current. Through simple and fast settings, the current can be changed easily to meet the current demand of the adapted lamp.

* The LT-ISET editor can modify the current when the driver is not powered on. It is recommended to modify the current value successfully before installing. (The current value you modify can be burned to the dimmable LED driver when it's offline. No need to power it on.)



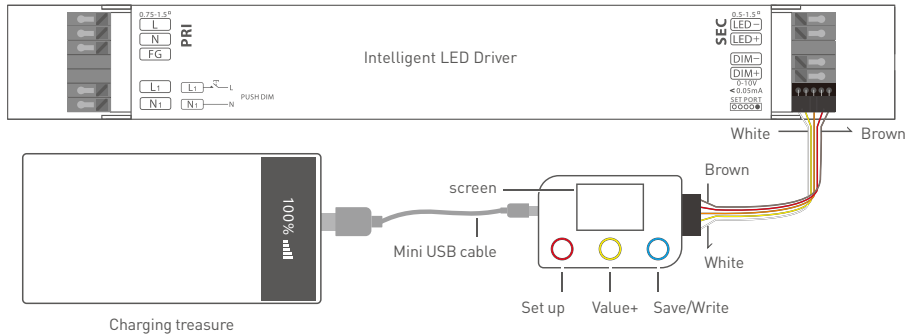


Operating Instructions for the LT-ISET editor




1. Insert the wires of the ISET editor into the driver whose current needs to be changed in the correct direction (as shown above). After connecting the driver successfully, use the Mini USB cable to connect the editor and power it on.
2. Press the red "Setting" button on the left, the first digit of the current value on the screen is selected. The digit flashes to indicate that it has been selected. After selecting the digit, press the yellow "+" button in the middle to select and modify the value. (The range of the first digit is from 0 to 2 and the range of other digits is from 0 to 9). When the numeric value reaches the preset one, press the red "Setting" button again to select the next digit to modify its value, and so on.
3. When the current value reaches the preset value, press the blue button on the right to save the current value. Press the blue button again to write. When you hear a short beep of the editor, the current value will be set up successfully. If you hear a long beep of the editor, it means that the current value exceeds the current range of the driver and the setting fails.

Relationship Diagrams




Characteristic diagram of efficiency curve

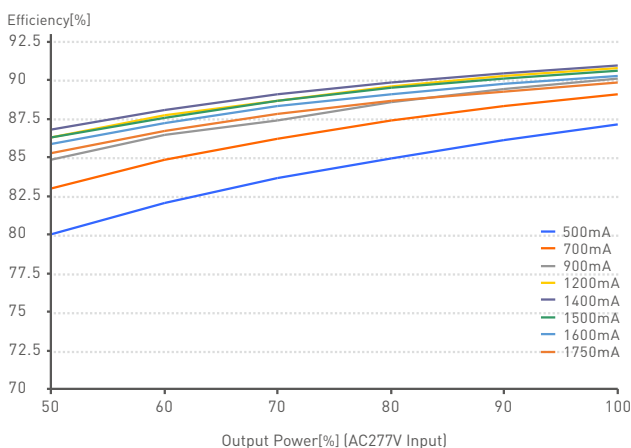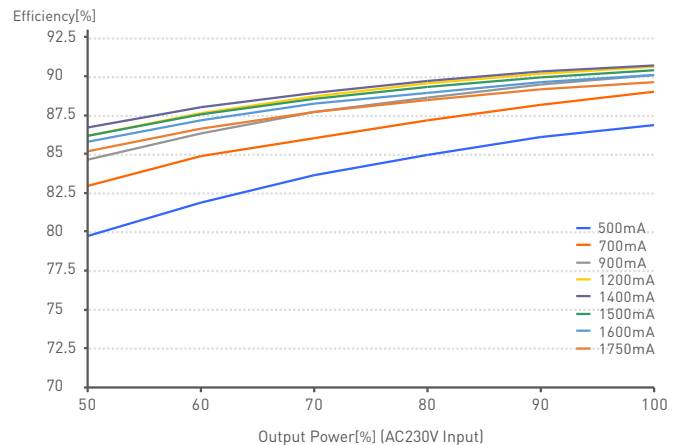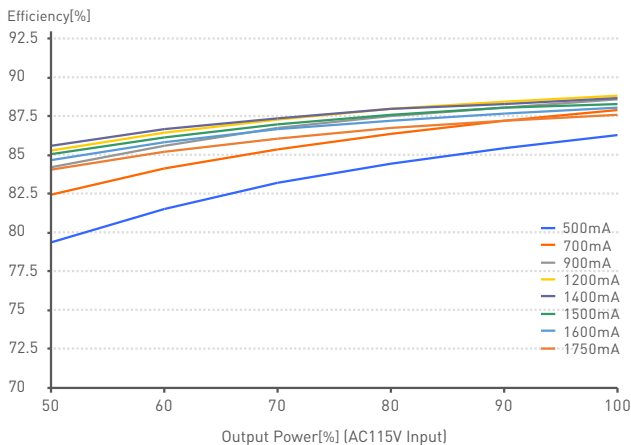

THD Characteristic Curve

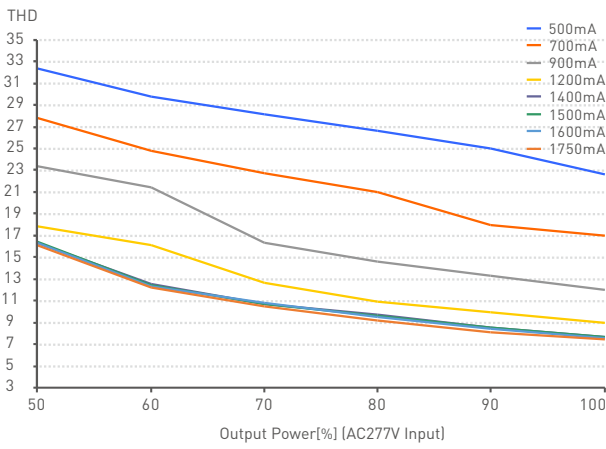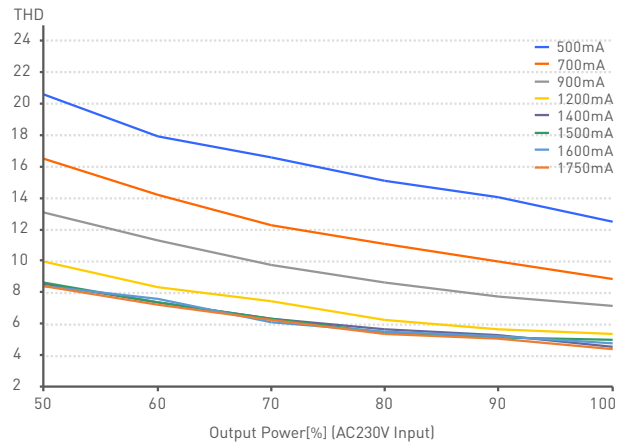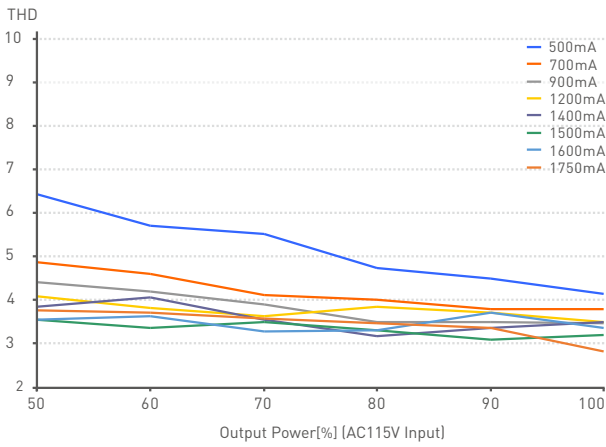

PF Characteristic Curve

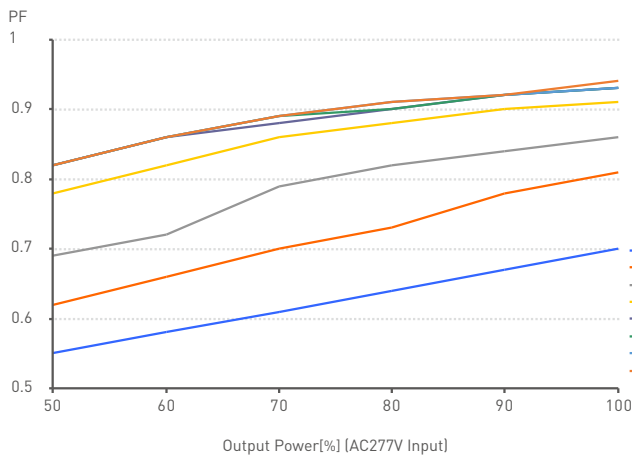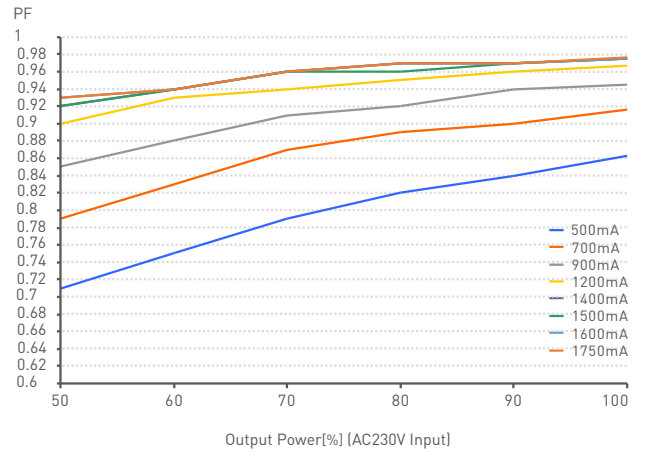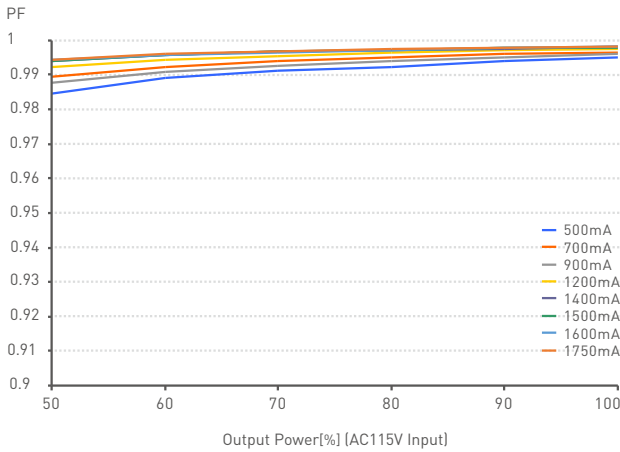


Flicker Test Table

IEEE 1789

| Limit Value of Modulation in Low Risk Areas | |
|--|---|
| Waveform frequency of Optical output (f) | Limit value (%) |
| $f \leq 8\text{Hz}$ | 0.2 |
| $8\text{Hz} < f \leq 90\text{Hz}$ | $0.025 \times f$ |
| $90\text{Hz} < f \leq 1250\text{Hz}$ | $0.08 \times f$ |
| $f > 1250\text{Hz}$ | Exemption assessment |
| Limit Value of Modulation in No Effect Areas | |
| Waveform frequency of Optical output (f) | Limit value (%) |
| $f \leq 10\text{Hz}$ | 0.1 |
| $10\text{Hz} < f \leq 90\text{Hz}$ | $0.01 \times f$ |
| $90\text{Hz} < f \leq 3125\text{Hz}$ | $[0.08/2.5] \times f$ |
| $f > 3125\text{Hz}$ | Exemption assessment (High frequency exemption) |

- Brightness
- ▲ 0.1%
 - ◆ 1%
 - ▲ 5%
 - ◆ 10%
 - 20%
 - ▲ 30%
 - 40%
 - ★ 50%
 - 60%
 - 70%
 - 80%
 - ★ 90%
 - ◆ 100%

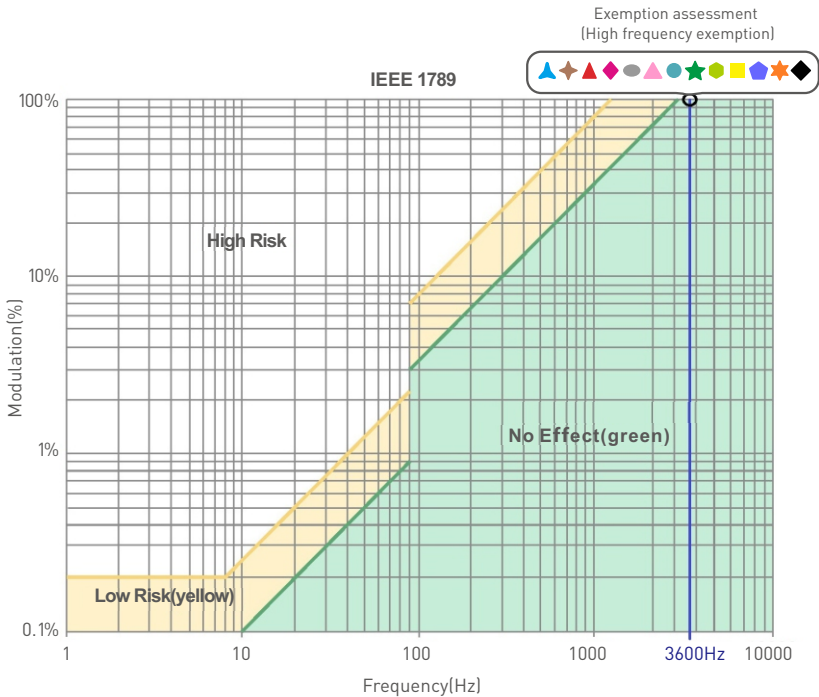

Marks in the right chart are tested results of different current level. The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Attentions

- Products shall be installed by qualified professionals.
 - LTECH products are non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
 - Good heat dissipation will extend the working life of products. Please ensure good ventilation.
 - Please check if the working voltage used complies with the parameter requirements of products.
 - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
 - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
 - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- * This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.