

1. Features

Product adopt the widely used 2.4GHz wireless technology with the features of low power consumption, long signal transmitting and strong anti-interference, etc. Product has auto-transmitting function. Widely used on the controlling of hotel lighting and home lighting.

Dual White LED Controller



Color temperature adjustable



Remote control
Control distance 30m



Dim brightness



Smartphone app control
(2.4GHz gateway is needed)




2.4G RF wireless
transmission technology



Support third party voice control
(2.4GHz gateway is needed)



Signal transmitting

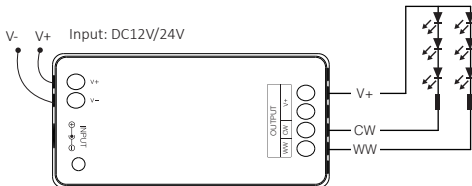

Single Color LED Controller



Dim brightness



Remote control
Control distance 30m



2.4G RF wireless
transmission technology






Smartphone app control
(2.4GHz gateway is needed)



Signal transmitting &
Modes synchronization




Support third party voice control
(2.4GHz gateway is needed)

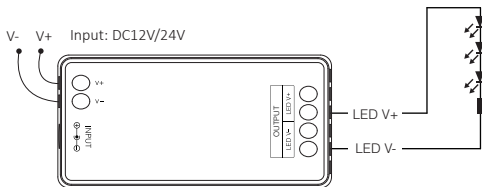

Install The Battery For Remote

Note: 2*AAA Battery need to buy seperately




1. Open battery cover behind remote.



2. Install battery correctly and close battery cover.

2. Button Diagram

Turn on lights /
Link / Unlink
Brightness



Color temp.

Turn off lights

Touch ring: brightness, color temperature, use together.

(It turns to adjust brightness by default if remote is not operated for 3 seconds)

3. Remote Instruction

- Adjust color temperature

Short press  key once, then touch  to adjust color temperature.


- Adjust brightness

Short press  key once, then touch  to adjust brightness.

4. Linking Code / Unlinking Code Instructions


Attention: No need to match code since its already matched code in factory setting

Linking Code Instructions

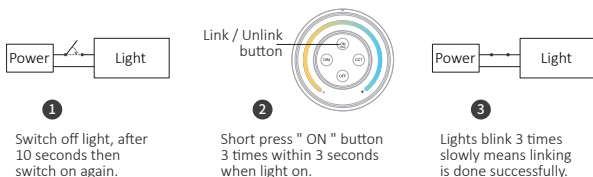

Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)


Unlinking Code Instructions

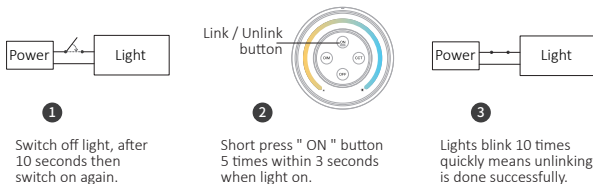

Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)

5. Signal transmitting

One light can transmit the signals from the remote control to another light within 30m, as long as there is a light within 30m, the remote control distance can be limitless.



6. PWM high frequency / low frequency switching

Switch to high frequency (8KHz): on the condition of turning on the light

1. Short press the **"OFF"** button of the remote control once;
2. Short press the **"ON"** button 5 times within 3 seconds, the white light blink 2 times quickly, indicating successfully.

Switch to low frequency (500Hz): on the condition of turning off the light

1. Short press the **"ON"** button of the remote control once;
2. Short press the **"OFF"** button 5 times within 3 seconds, the white light blink 2 times slowly, indicating successfully.

7. Scan QR code to watch video instruction



Smartphone app control
(WL-Box1 video)



Third party voice control

8. Attention

1. Please check whether the voltage of the power supply is in accordance with the light, and please check the connection of both the cathode and anode, otherwise the light will be broken.
2. Please don't connect wires with power on. Please turn on again only when it is in right connection and no short circuit.
3. Non-professional user cannot dismantle the lighting fixtures directly.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.

Made in China



Light can not
use in humid area