
FUT092 Link/Unlink

Link: First power off, then power on, within 3 seconds touch any of the Zone-ON button 3 times shortly, the link is done when you see the light blinks 3 times with green color, otherwise try again later.

Unlink: First power off , then power on , within 3 seconds touch the linked Zone-ON button or the Master-ON button 5 times shortly, the unlink is done when you see the light blinks 10 times with red color, otherwise try again later.



FUT095 FUT096 Link/Unlink

Link: Press any '|' button of the 4 zones immediately once you switch on the light bulb. The link is done once the light blinks 3 times.


Unlink: Long press the '|' button of the linked zone immediately once you switch on the light bulb. The unlink is done once the light blinks 9 times.

Hold '| ' to get white mode,

Under white mode, press 'S-' to get warm white, press 'S+' to get cool white,

Under color mode, press 'S+/S-' for saturation control,

When press 'M', S+/S- can adjust the speed of the dynamic modes.

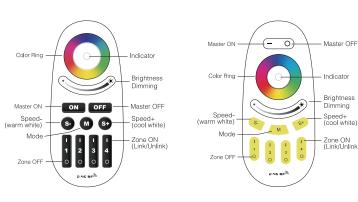

- 1. Link the spotlight with the remote control or the smart phone App before use!
- 2. Mi-Light WiFi ibox is needed for App control
- 3. Make sure the voltage is between AC86-265V.
- 4. Avoid using under high temperature or moisture.
- 5. Make sure the power is off before installation.

Mi · Light[®] **User Instruction**



GU10 RGB+CCT LED Spotlight (FUT103) MR16 RGB+CCT LED Spotlight (FUT104)

Features



RGB+CCT

16 Millions of colors to choose



Color temperature 2700-6500K



Dimmable Saturation control



Remote control 2.4GHz RF, Control distance 30m




Smart phone App control Mi Light WiFi ibox is needed












GU10 RGB+CCT LED Spotlight

Model No.: FUT103 Power: 4W Voltage: 86-265V Lifespan: 50000h Max Diameter: 50mm Max Length: 57mm Color temperature: 2700-6500K Luminous Flux: 250LM-280LM Luminous Efficiency: 70LM/W







MR16 RGB+CCT LED Spotlight

Model No.: FUT104 Power: 4W Voltage: AC/DC12V Lifespan: 50000h Max Diameter: 50mm Max Length: 49mm Color temperature: 2700-6500K Luminous Flux: 250LM-280LM Luminous Efficiency: 70LM/W CRI: >80 Beam angle: 25°

Put the light bulb in the suitable lighting fixture.





Step 2

Link/Unlink

Compatible with these three remote controls

