

O/1-10V and RF Constant Voltage LED Line Driver

Model No.: PS-75-12, PS-75-24



PS-75-12





PS-75-24



Features

- Dimming interface: RF Wireless, 0-10V, 1-10V, 10V PWM, Resistor, AC Push-Dim
- Match with Skydance's 2.4G single color remote control, one RF LED driver accepts up to 10 remote controls
- Universal AC input / Full range
- 1 channel constant voltage output, Max. total output power 75W
- Built-in active PFC function: 0.95 Typ
- Auto-transmitting function: LED driver automatically transmit signal to another LED driver with 30m control distance
- Synchronize on multiple number of LED drivers
- Over-heat / Over-load / Short circuit protection, recover automatically
- Suitable for indoor LED lighting application
- 5 Year, 50,000hr warranty

Mechanical Structures and Installations

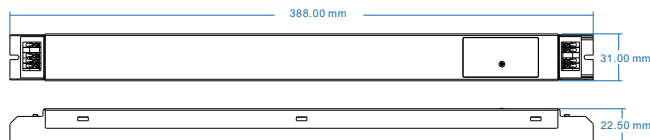

Technical Parameters


Model		PS-75-12	PS-75-24	
Output	Output Voltage	12VDC	24VDC	
	Output Current	Max. 6.25A	Max. 3.125A	
	Output Power	Max. 75W		
	Dimming Range	0~100%		
	Ripple & Noise	<= 150mV / 240VAC	<= 50mV / 240VAC	
	PWM Frequency	500Hz		
	Rise Time	1.98s / 100VAC, 1.95s / 240VAC	1.51s / 100VAC, 1.48s / 240VAC	
Input	Hold Time	8ms / 100VAC, 8ms / 240VAC	10ms / 100VAC, 6ms / 240VAC	
	Input Voltage Range	100VAC~240VAC		
	Frequency Range	50 / 60Hz		
	Efficiency	86% @ 230VAC	88% @ 230VAC	
	Alternating Current	0.81A @ 110VAC, 0.40A @ 240VAC	0.79A @ 110VAC, 0.39A @ 240VAC	
	PowerFactor	> 0.99 @ 110VAC, > 0.95 @ 230VAC		
	Inrush Current	Cold start 23.2A at 240VAC	Cold start 29.2A at 240VAC	
Protection	Leakage Current	< 5mA		
	No Load Power	1.2W @ 110VAC / 230VAC	1.8V @ 110VAC / 230VAC	
	Over Load Power	Shut down the output when current load >= 120%~150%, auto recovers.		
	Short Circuit	Shut down automatically if short circuit occurs, auto recovers.		
	Over Temperature	Intelligently adjust or turn off the output current if the PCB temp > 100°C, auto recovers.		
	Environment	Working Temperature	-30°C~50°C	
		Tcase Max	70°C	
Working Humidity		20%~90%RH, non-condensing		
Storage Temperature/Humidity		-40°C~80°C, 10%~95%RH		
Temperature Coefficient		± 0.03%/°C (0-50%)		
Vibration Resistance		10-500Hz, 2G, 6min/cycle, X,Y,Z axes/Zmin		
IP Rating		IP20		
Safety&EMC	Security Specifications	IEC/EN61347-1, IEC/EN61347-2-13		
	Withstand Voltage	1/PO/P: 3750VAC		
	Insulation Resistance	1/PO/P: 100MΩ/500VDC/25°C/70%RH		
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3		
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547		
	Certifications	CE, EMC		

Applications

- Suitable for LED related fixture or appliance which use LED light bar and LED tape (like LED Decoration or Advertisement devices).
- Office / Commercial / Domestic Lighting, Hotels, Retail and Display.
- Use for retrofit upgrades & new luminaire designs.

Wiring Diagram

1. RF Connection

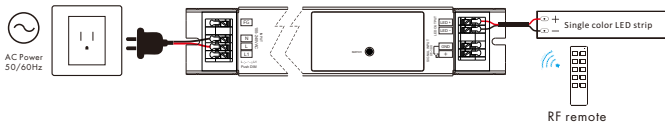

Match Remote Control (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use Match key

Match:
Short press match key, immediately press on/off key (single zone remote) or zone key (multiple zone remote) of the remote.

Delete:
Press and hold match key for 5s to delete all match, The light blinks 5 times means all matched remotes were deleted.

Use Power Restart

Match:
Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.

Delete:
Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

When use multiple RF drivers, two application method:

1. All the drivers in the same zone.

Auto-transmitting: One driver can transmit the signals from the remote to another driver within 30m, as long as there is a driver within 30m, the remote control distance can be limitless.


Auto-synchronization: Multiple drivers within 30m distance can work synchronously when they are controlled by the same remote.

Driver placement may offer up to 30m communication distance. Metals and other metal materials will reduce the range. Strong signal sources such as WiFi routers and microwave ovens will affect the range.

We recommend for indoor applications that driver placements should be no further apart than 15m.


2. Each driver(one or more) in a different zone, like zone 1, 2, 3 or 4.

2. O/1-10V Connection

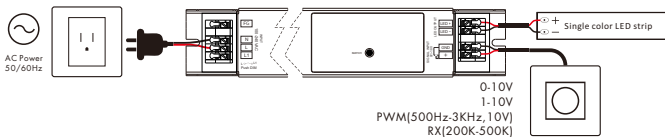

- The O/1-10V input is operable via commercially available simple rotary wall switches designed for O/1-10V dimming equipment or from dedicated system central dimming controllers.
- Compliant with 0-10V, 1-10V, 10V PWM, RX14 in 1).
- We recommend the number of LED drivers connected to O/1-10V dimmer does not exceed 5 pieces, The maximum length of the wires from dimmer to LED driver should be no more than 1.5 meters.
- If the LED driver be used with the RF remote or Push-Dim interface prior to using the O/1-10V interface, the O/1-10 V signal should change over 10% to return O/1-10 V control.

3. AC Push-Dim connection

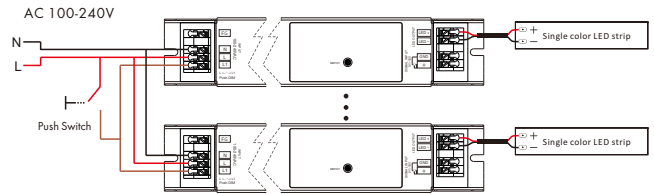


The provided AC Push-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches.

- **Short press:**
Turn on or off light.
- **Long press (1-5s):**
Press and hold to step-less dimming, With every other long press, the light level goes to the opposite direction.
- **Dimming memory:**
Light returns to the previous dimming level when switched off and on again, even at power failure.
- **Synchronization:**
If more than one LED driver are connected to the same push switch, do a long press for more than 10s, then the system is synchronized and all lights in the group dim up to 100%. This means there is no need for any additional synchrony wire in larger installations. We recommend the number of LED drivers connected to a push switch does not exceed 25 pieces, The maximum length of the wires from push to LED driver should be no more than 20 meters.

Dimming Curve

RF and Push dimming



O/1-10V dimming

