

LED Intelligent CT Driver (CV)

- DALI-2 DT6/DT8, DIM and color temperature adjusting driver
- Dimming range: 0~100%, LED start at 0.1% possible.
- Color temperature adjusting range: 2700~6500K
- 2 independently SELV constant voltage output channels
- High Efficient driver: PF>0.96, THD<10%
- 0-100% flicker-free, High frequency exemption level.
- DIM/CCT5 interfaces: DALI-2 DT6/DT8 /0-10V,1-10V,

10V PWM,RESISTANCE DIM

- In line with the EU energy efficiency ERP directive, standby power consumption < 0.5W
- Constant power design, adjust different color temperature to keep the same brightness.
- Over load / Over temp. / Short circuit / Over voltage protection, recover automatically.
- Suitable for internal lights application for I / II / III.
- Up to 50000-hour life time.

Dimmable:

0.1%~100%



DIM/CT



0-10V
1-10V
10V PWM
Resistance DIM
DALI-2
PUSH DIM/CCT

PF>0.96

THD<10%

Flicker-free

IEEE 1789
High frequency exemption level




Specification


Model		YSD-300WUDF-12S	YSD-300WUDF-24S	YSD-300WUDF-36S	YSD-300WUDF-48S
OUTPUT	Output voltage	12VDC	24VDC	36VDC	48VDC
	Output voltage range	12VDC±0.3VDC	24VDC±0.6VDC	36VDC±0.6VDC	48VDC±0.6VDC
	Output current	Max 25A	Max 12.5A	Max 12.5A	Max 12.5A
	Output power	Max 300W			
	Output power range	0~300W			
	With or without strobe	No strobe			
	Dimming range	0~100%, dimming depth: Max. 0.1%			
	Ripple & Noise	≤150mV	≤240mV	≤360mV	≤480mV
	PWM frequency	4~16Khz			
INPUT	DIM/CCT interface	DALI-2 DT6/DT8/0-10V/1-10V/10V PWM/RESISTANCE DIM(0-100K)			
	Input voltage	100-264Vac			
	Frequency	50/60Hz			
	Input current	3.2~1.35A			
	Power factor	PF>0.96/230Vac, at full load			
	THD	≤10% at 230Vac, at full load			
	Efficiency (typ.)	92%	93%	93%	94%
	Inrush current(typ.)	Cold start 60A at 230Vac			
	Control surge capability	L-N:1KV			
	Leakage current	Max. 0.5mA			
ENVIRONMENT	Working temperature	ta: -25°C ~ 50°C tc: 90°C			
	Working humidity	20 ~ 95%RH, non-condensing			
	Storage temp., humidity	-40°C ~ 80°C, 10~95%RH			
	Vibration	10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.			
PROTECTION	Overtemperature	Protection type:Shut down o/p voltage,re--power on to recover			
	Over voltage protection	The no-load voltage is greater than 120%~150% rated output voltage. Shut down the output and It can be automatically restored after the fault is eliminated			
	Short circuit protection	Protection type: 1. When the first level short-circuit protection is triggered, the fault will recover automatically after 3 seconds. 2. When the second-level short-circuit protection is triggered, the power needs to be turned on again after the fault is eliminated			
SAFETY & EMC	Withstand voltage	I/P-O/P: 3750Vac			
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	Safety standards	IEC/EN61347-1, IEC/EN61347-2-13			
	EMC emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3			
	EMC immunity	EN61000-4-2,3,4,5,6,8,11 EN61547			
	Strobe test standard	IEEE 1789			

Dimensions

Unit: mm

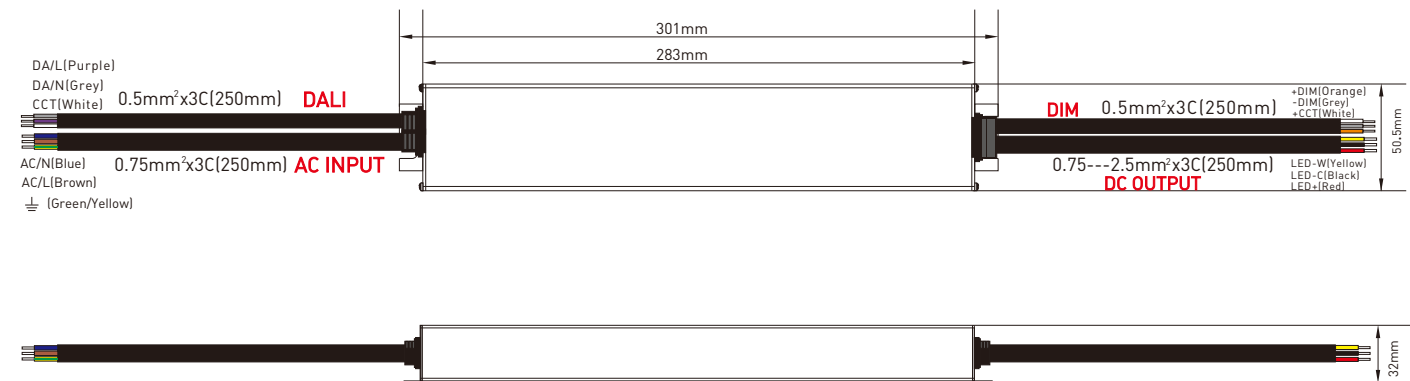

Wiring diagram

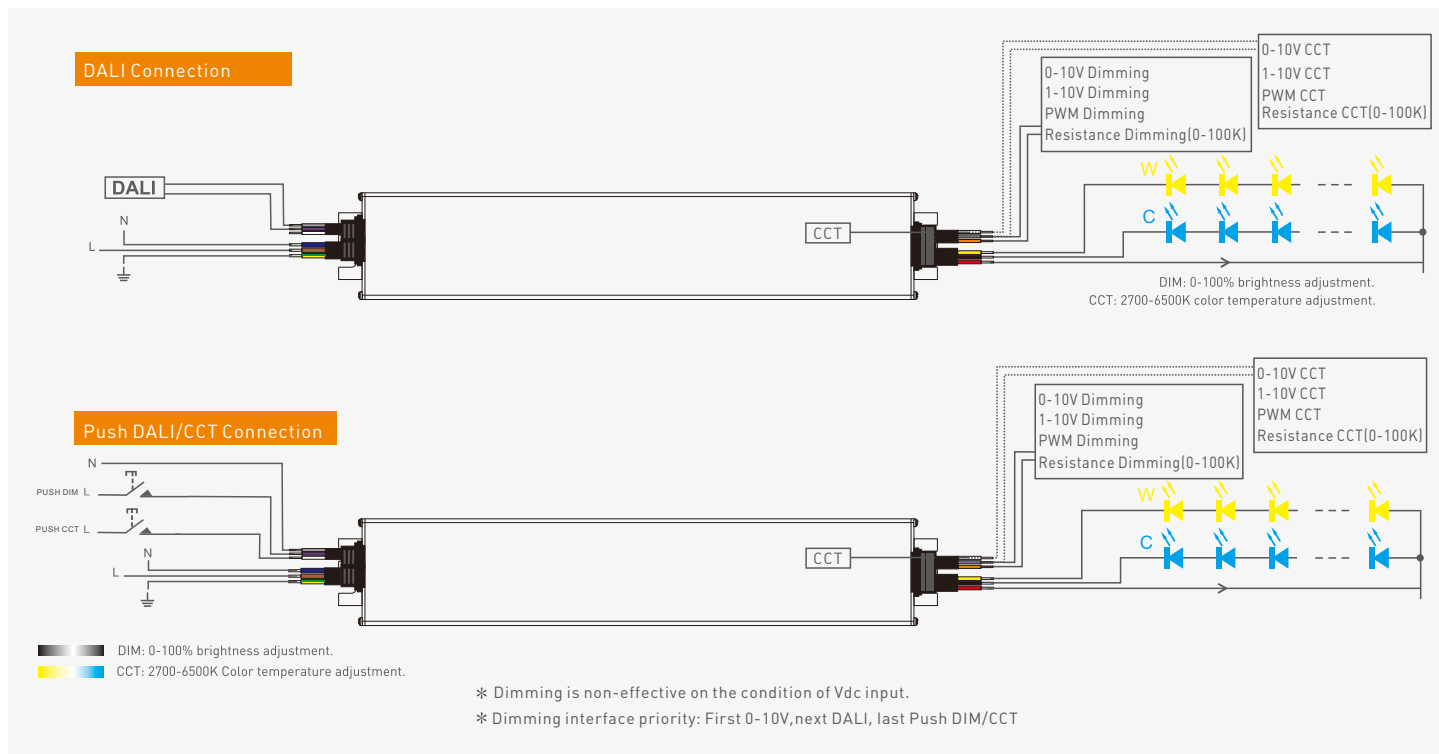

Push DIM



Reset Switch

- On/off control: Short press
- Stepless dimming: Long press
- With every other long press, the brightness level goes to the opposite direction.
- Dimming memory: Go to the brightness level adjusted previously when lights are turned on.


Push CCT




Reset Switch

- Switch color temperature by bin: Short press to preset 4 level color temperature
- Stepless Tinting: Long Press
- Every other long press, the color temperature will be adjusted in the opposite direction
- Color Memory: When PushDIM briefly presses the switch, the light returns to its previously adjusted brightness and color temperature.


Relationship diagrams

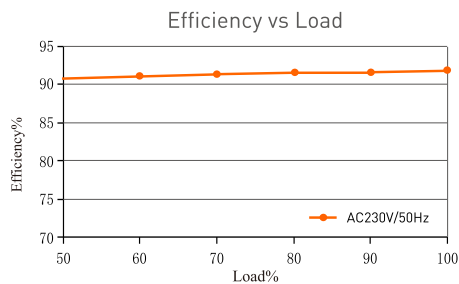


YSD-300WUDF-12S

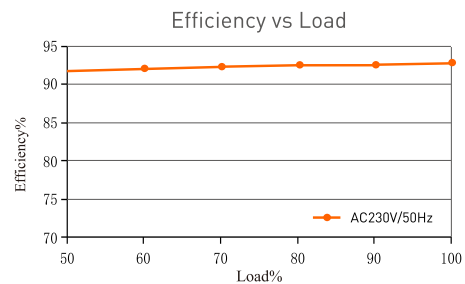

YSD-300WUDF-24S

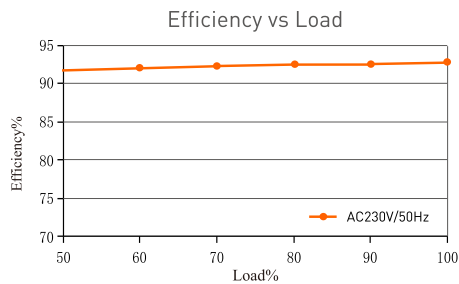


YSD-300WUDF-36S

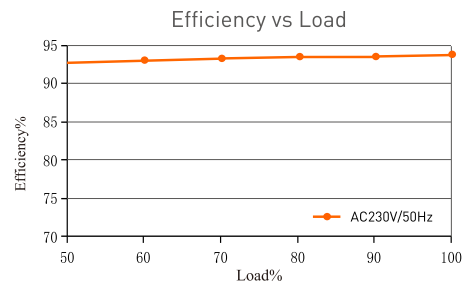

YSD-300WUDF-48S

Packaging Information

DIMENSION	301x50.5x32mm(LxWxH)
PACKING	353x65x35mm(LxWxH)
CARTON QUANTITY	15PCS
CARTON SIZE	368x195x220mm(LxWxH)
WEIGHT	965g±10gPCS

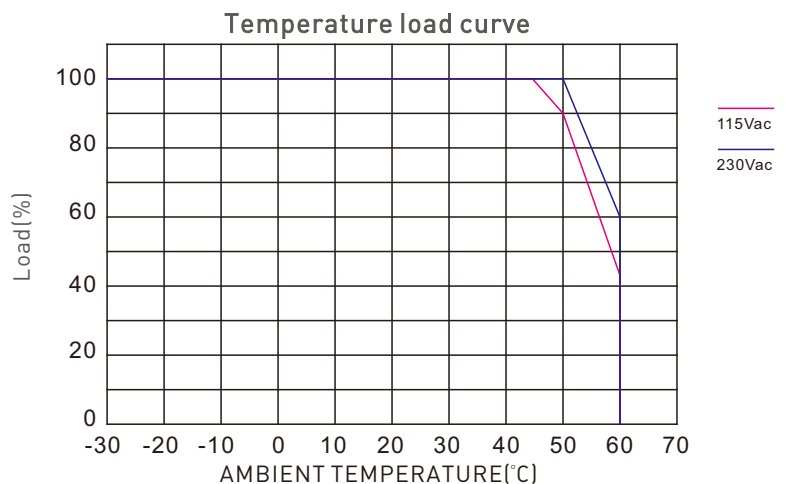

Flicker Test Form

IEEE 1789

Limit of Modulation in low risk area	
Waveform frequency of Optical output	limit (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit of Modulation in no effect area	
Waveform frequency of Optical output	limit (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$(0.08/2.5) \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- 1% (brown star)
- 5% (red triangle)
- 10% (pink diamond)
- 20% (grey circle)
- 30% (pink triangle)
- 40% (teal circle)
- 50% (green star)
- 60% (yellow circle)
- 70% (yellow square)
- 80% (blue pentagon)
- 90% (orange star)
- 100% (black diamond)

Exemption assessment
(High frequency exemption)

