

RGB+CCT Remote

Model No.: C4

Product Feature


- RGB, Brightness and color temperature adjustable
- 2.4GHz wireless transmission technology
- Support MiBoxer/Mi-Light 2.4G series
- Control distance: 30m
- Supports matching multiple devices and can control multiple devices at the same time
- Easy installation, magnetic mounting
- For commercial, hotel and home lighting




Product Parameter

Product Name: :	RGB+CCT remote	Working temperature: :	-10~40℃
Model No.:	C4	EMC standard(EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Working voltage:	3V(AAA*2PCS)	Security Standard (LVD):	EN 61347-2-11:2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Standby consumption:	15μA	Radio equipment (RED):	ETSI EN 300 400 V2.2.1
Transmission:	6dBm	Certification:	CE, EMC, LVD, RED
Protocol:	2.4GHz RF		
Modulation:	GFSK		
Control Distance:	30M		


Remote



Remote Holder



Function

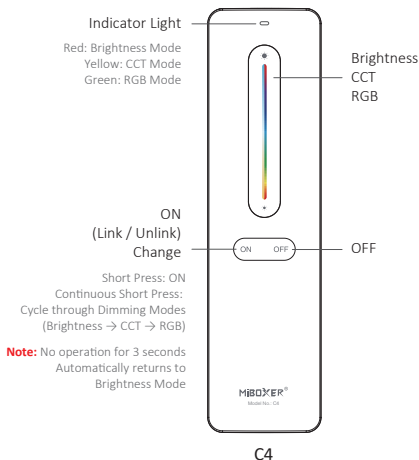

Function

Up and down to change brightness, CCT, RGB

Short Press: ON

Continuous Short Press: Cycle through Dimming Modes (Brightness → CCT → RGB)

Note: No operation for 3 seconds Automatically returns to Brightness Mode

Dim Brightness

Indicator is red

Dim CCT

Indicator is yellow


Dim RGB

Indicator is Green



Link/Unlink

Link controller must link with remote before using it




turn off light 10 seconds and turn on again



Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if remote already finished linking)




short press "ON" 3 times within 3 seconds



link is done once light flashes 3 times slowly

Unlink




turn off light 10 seconds and turn on again



Unlink is failed if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the light never be linked)




short press "ON" 5 times within 3 seconds




link is done once light flashes 10 times quickly

Installation



Remove the sticker on the holder



Stick the holder on the wall and put remote on the holder

Attention:

1. To control MiBoxer/Mi-Light 2.4G series products, Please refer to the product manual for compatibility.
2. Don't use it in humidity or high temperature area, please take out battery if don't use it frequently and keep it in dry or static electricity area
3. Don't use it near metal or strong magnetic area, it will affect signal and lost distance.



Made in China