


2 4G LED Dimming Controller



Main Characteristics


F5 RF Dimming Remote Control

- Remote Option: Dimming, 4 zones control
- Working Voltage: 3Vdc (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Visual Distance: 20m
- Working Temperature: -30 -55
- Package Size: L150xW46xH18(mm)
- Weight(G.W.): 80g

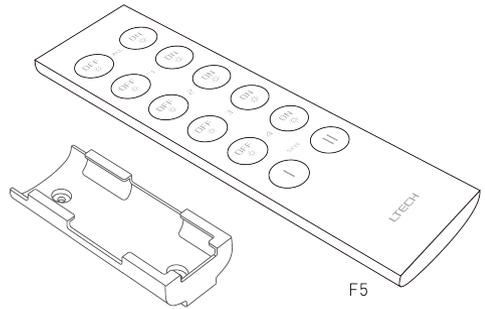


F4-3A CV Receiver

- Input Voltage: 5-24Vdc
- Max Current Load: 3A x 4CH Max. 12A
- Max Output Power: 60W/144W/288W(5V/12V/24V)
- Working Temperature: -30 -55
- Package Size: L127xW35xH24(mm)
- Weight(G.W.): 60g



F4-3A



F4-5A/F4-CC

F4-5A CV Receiver


- Input Voltage: 5-24Vdc
- Max Current Load: 5A x 4CH Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30 -55
- Package Size: L178xW48xH33(mm)
- Weight(G.W.): 150g

Note: Receiver is sold separately.


F4-CC CC Receiver

- Input Voltage: 12-48Vdc
- Output Voltage: 3-46Vdc
- Output Current: CC 350/700/1050mA x 4CH
- Output Power: 1.05W-48.3W x 4CH Max 193.2W
- Working Temperature: -30 -55
- Package Size: L178xW48xH33(mm)
- Weight(G.W.): 165g


Dimensions

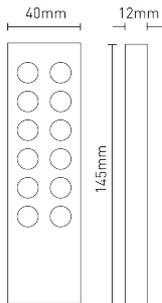


F5



Holder

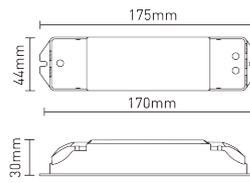


F4-5A/F4-CC




F4-3A

Operating Instruction for Remote:

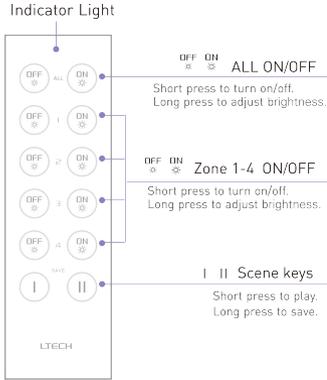


Match/Clear code between remotes

Match code:

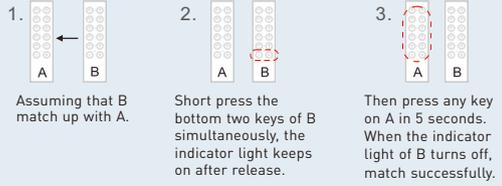

Clear code:



Match/Clear code between remote and receiver

Match code:

Method 1 :

- Step 1. Power on the receiver, and complete step 2 in 10 seconds.
- Step 2. Long press the matching zone key "ON", "OFF" on the remote simultaneously, the lamps flicker several times, the buzzer beep once, match successfully.

Method 2 :

- Step 1. Short press the ID learning button on the receiver, the buzzer beep once.
- Step 2. Long press the matching zone key "ON", "OFF" on the remote simultaneously, the lamps flicker several times, the buzzer beep once, match successfully.

Clear code:


Method 1 :

Power on and off the receiver continuously for 5 times, If the buzzer long beep and lamps flicker twice, deactivate the matching successfully.



Method 2:

Long press "ID learning button" on receiver for 5 seconds, If the lamps flicker twice, deactivate the matching successfully.



Wiring Diagram :

