



DALI Double Address Push Switch

- PC plastic shell.
- · Small size, easy installation.
- No external power supply, simply connected to the DALI bus.
- Low voltage operation, safe and reliable.
- · Applicable to home, office, hotel, supermarket etc.
- · Ordinary reset switch can achieve DALI intelligent control.











Main Characteristics


- Interface Protocol: DALI (IEC62386)
- Power Supply: DALI Bus
- Current: ≤8mA (static)
- Working Temperature: -30°C~55°C
- Address Mode: 0-63
- Dimensions: L48×W28×H14(mm)
- Package Size: L50×W40×H30(mm)
- Weight(G.W.): 32g





Hide this product in the switch box

Dimensions





Installation Instruction






Set address via dip switch:

Address value=the total value of (1-6), to get the place value when in "on" position, otherwise will be 0.



1 2 3 4 5 6 7 8	ON CHA 1 2 3 4 5 6 7 8 0 0 0 0 0 0 0 0 0 Address 1	ON CHA 1 2 3 4 5 6 7 8 10 0 0 0 0 0 0 Address 2	1 2 3 4 5 6 7 8	ON CHA 1 2 3 4 5 6 7 8 0 0 0 0 0 0 0 Address 4	ON CHANCE	1 2 3 4 5 6 7 8 0 0 5 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	1 2 3 4 5 6 7 8 2 8 9 5 8 Address 7	ON CHA 1 2 3 4 5 6 7 8 0 0 0 0 0 0 0 Address 8	1 2 3 4 5 6 7 8
ON CHA 1 2 3 4 5 6 7 8 Address 10	ON CHA 1 2 3 4 5 6 7 8 Address 11	ON CHA 1 2 3 4 5 6 7 8 Address 12	ON CHA 1 2 3 4 5 6 7 8 Address 13	ON CHA 1 2 3 4 5 6 7 8 Address 14	ON CHA 1 2 3 4 5 6 7 8 Address 15	ON CHA 1 2 3 4 5 6 7 8 Address 16	ON CHA 1 2 3 4 5 6 7 8 Address 17	ON CHA 1 2 3 4 5 6 7 8 Address 18	ON CHA 1 2 3 4 5 6 7 8 Address 19
N CHA	1 2 3 4 5 6 7 8 Address 21	1 2 3 4 5 6 7 8 Address 22	Address 23	1 2 3 4 5 6 7 8 Address 24	OM CHA 1 2 3 4 5 6 7 8 Address 25	1 2 3 4 5 6 7 8 Address 26	Address 27	1 2 3 4 5 6 7 8 Address 28	Address 29
Address 30	Address 31	Address 32	Address 33	1 2 3 4 5 6 7 8 Address 34	Address 35	Address 36	1 2 3 4 5 6 7 8 Address 37	Address 38	Address 39
ON 1 2 3 4 5 6 7 8 Address 40	1 2 3 4 5 6 7 8 Address 41	Address 42	1 2 3 4 5 6 7 8 Address 43	1 2 3 4 5 6 7 8 Address 44	ON CHA 1 2 3 4 5 6 7 8 Address 45	1 2 3 4 5 6 7 8 Address 46	1 2 3 4 5 6 7 8 Address 47	1 2 3 4 5 6 7 8 Address 48	Address 49
ON CHA 1 2 3 4 5 6 7 8 Address 50	ON CHA 1 2 3 4 5 6 7 8 Address 51	ON CHA 1 2 3 4 5 6 7 8 Address 52	ON CHA 1 2 3 4 5 6 7 8 Address 53	ON CHA 1 2 3 4 5 6 7 8 Address 54	ON CHA 1 2 3 4 5 6 7 8 Address 55	ON CHA 1 2 3 4 5 6 7 8 Address 56	ON CHA 1 2 3 4 5 6 7 8 Address 57	ON CHA 1 2 3 4 5 6 7 8 Address 58	ON CHA 1 2 3 4 5 6 7 8 Address 59



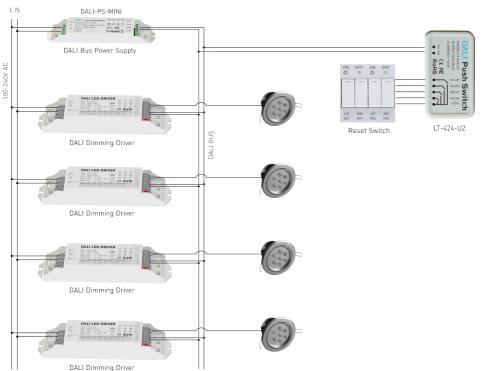

Installation: 1. Disconnect the power supply of all devices on the DALI bus before installing.

- 2. Connect according to the above wiring diagram. DALI bus does not distinguish plus-minus polarity. Meanwhile connected to the reset switch.
- 3. Open the shell, set up the address.

Note: This product is only suitable for the reset switch. It can be Key 1, Key 2, Key 3 or Key 4.

Troubleshooting: If the switch failure occurs after pressing, please check:

- 1. If the connection is correct;
- 2. Make sure to use the reset switch;
- 3. Check if the DALI power output is stable.