

# **Mi • Light<sup>®</sup>**

## **User Instruction**

**IP Rate: IP66**

**6W RGB+CCT Smart LED Garden Light**

Model No.: FUTC04

# Features



RGB+CCT

16 Millions of colors to choose



Color temperature

2700~6500K



Dimmable

Saturation control



2.4G RF wireless transmission  
technology



Remote control

Control distance 30m



Smart phone APP control

Mi-Light WiFi iBox or WiFi Remote is needed



Support amazon alexa voice control

Mi-Light WiFi Remote is needed



Waterproof and dustproof  
grade IP66



Beam Angle 25°

Illumination distance Greater than 10m

# Parameters

Model No.: FUTC04

Input: AC100~240V 50/60Hz

Power: 6W

Color temperature: 2700K~6500K

Luminous Flux: 420LM

Light Efficiency: 70LM/W

CRI: >75


PF: >0.5

Lifespan: 50000 hours

Beam Angle: 25°


Illumination distance: >10m

IP Rate: IP66

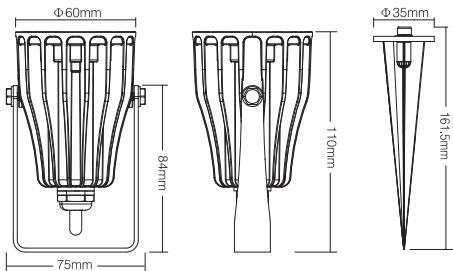


## Auto-transmitting Diagram

One garden light can transmit the signals from the remote control to another garden light within 30m, as long as there is a garden light within 30m, the remote control distance can be limitless.

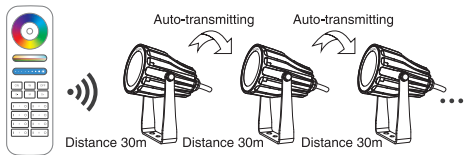


# Auto-synchronization function

Different garden light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed, and within 30m distance.

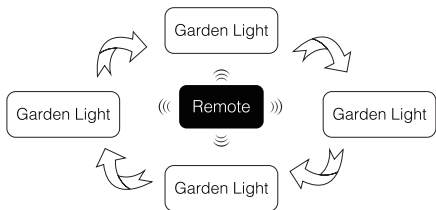

# Connection diagram

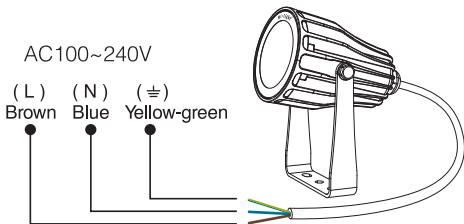

# Link/Unlink

Compatible with these remote controls (Purchased separately)



FUT089



FUT092



FUT088



FUT095




FUT096



B8



B4 / T4



B3 / T3



B0

 **NOTE:**

Lighting can be working after linking with remote;  
for more details, pls read the remote instruction.

# Attention

1. Please check whether the input voltage supply is in accordance with the garden light.
2. Non-professional user cannot dismantle the garden light directly, otherwise, it may and electric shock.
3. The working temperature is  $-10-60^{\circ}\text{C}$ ; do not use the device to direct sunlight, moist and other high temperature area.
4. Please do not use controller around the mental area and high magnetic field, otherwise, it will badly affect the control distance.
5. Users must be correct, strict and solid to install the light; do not use the light on strenuous vibration area.
6. The lighting will be heating on working, pls do not cover the lighting housing.



Made in China