

Mi • Light[®]

User Instruction

Mini WiFi LED Strip Controller

Model No.: YL1S / YL2S

Please read the instructions carefully before using the controller.

1. Features

The Mini WiFi controller is adopted by the most advanced PWM control technology, and has memory function(The light status will keep same as the status before you turn off the light); It can be controlled by the "Mi-light Cloud" APP via WiFi or 4G network. Support IR remote control and Amazon Echo voice control



Support Amazon
Alexa Voice Control



WiFi
Wireless Control



Smart phone
App control



Support
IR remote control



RGB colors to
choose



Dimmable
Saturation control



Timing ON/OFF
the lights



Group control
randomly by APP



16 Color Changing
modes

2. Parameters

Mini RGB WiFi LED Controller

Model No.: YL1S


Working Voltage: DC12 ~ 24V (5.5*2.1mm) $\ominus \text{---} \oplus$

Output Current: Max.4A

Working Temperature: -20~60°C

Communication Mode: WiFi-IEEE 802.11b/g/n 2.4GHz
or IR

G.W.: 20g

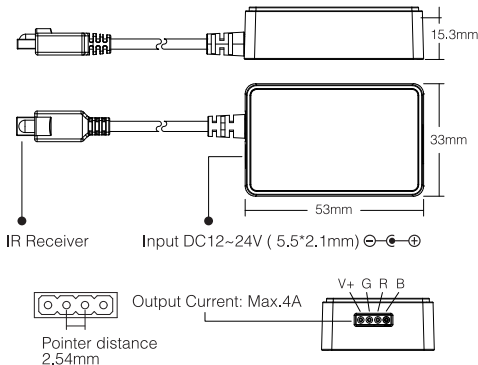

Mini RGBW WiFi LED Controller

Model No.: YL2S


Working Voltage: DC12 ~ 24V (5.5*2.1mm) $\ominus$ $\bullet$ $\oplus$

Output Current: Max.4A

Working Temperature: -20~60°C

Communication Mode: WiFi-IEEE 802.11b/g/n 2.4GHz
or IR

G.W.: 20g

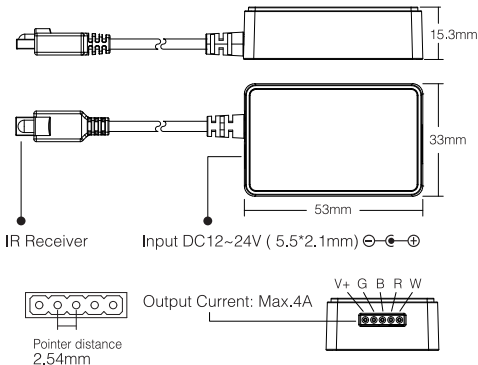


4. Connect to LED strip diagram




Controller input voltage must be in accordance with the required voltage of LED Strips.

(YL1S) Mini RGB WiFi LED Strip Controller

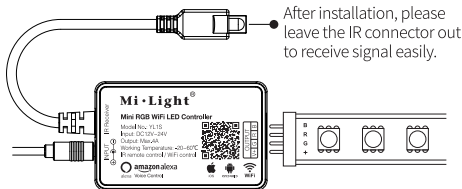

(YL2S) Mini RGBW WiFi LED Strip Controller

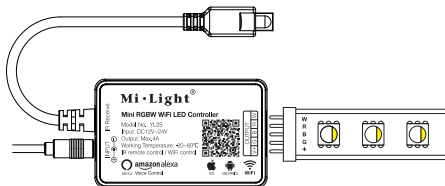


5. Compatible with IR remote controller

 Under dynamic mode, press this button to accelerate the jump speed.

 Under dynamic mode, press this button to lower the jump speed.

Brightness+
/ Speed+

Brightness-
/ Speed-

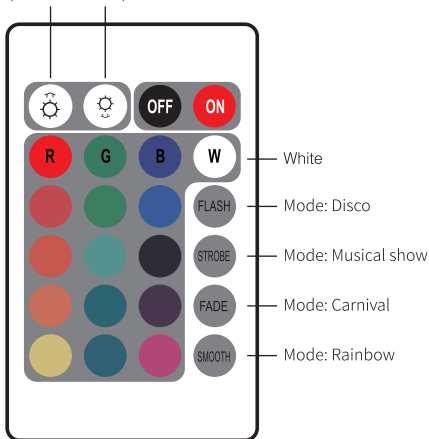



Attention

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode.
2. The working Voltage is DC12~24V, the controller will be broken if the voltage is higher than 24V.
3. Non-professional user cannot dismantle the controller directly, otherwise, it may cause fire and electric shock.
4. The working temperature is -20-60°C; Do not use the device to direct sunlight, moist and other high temperature area.
5. Please do not use controller around the mental area and high magnetic field, otherwise, it will badly affect the control distance.



Made in China



Mi-Light Cloud APP

User Instruction

1 APP Downloading

For IOS System: Pls search "Mi-Light Cloud" on APP store.
(Above IOS9.0)

For Android System: search "Mi-Light Cloud" on Google Play
(Above Android 5.0) or Scan below QR-code to download APP.



Scan QR Code to Install APP




iOS APP
App Store



ANDROID APP
Google play


2 Register Mi-Light Cloud Account

Open APP and click Register button; Complete the register and log in.

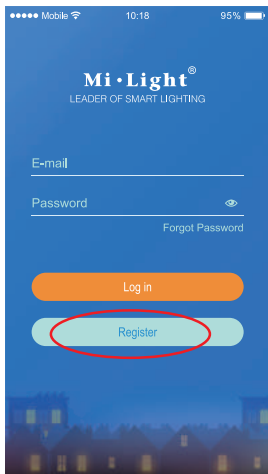

3 Add Device


1. Click the right top “+” on the device list.
2. Please select the device type you will add, then complete the adding according to the hint of APP.
3. Back to device list after adding successfully, then pull down refresh in list to get the device status.

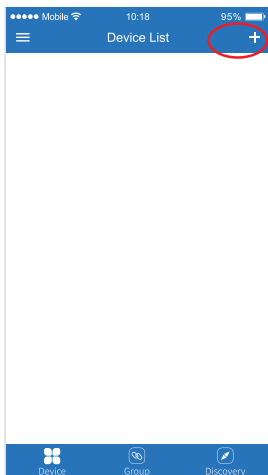

4 Modify device name or delete device

Slide device list to left, click " **Edit** " to modify device name; click " **Delete** " to delete device.


Note: If the device was shared to others, then the device will also be deleted on your friends' device list.

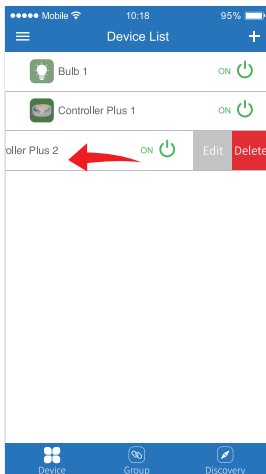

5 Group Control

1. Click  to switch to Group list, then click the right top  icon on the Group list to create groups.
2. Slide the Group list to left to **Edit/Delete** groups.

Note: The group just work on APP Controlling, cannot work on Voice control. Please open Amazon APP for Group Voice control.

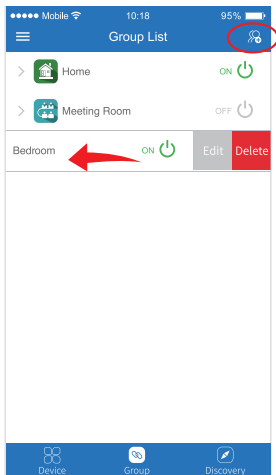

6 APP Control


Click the device or group that you want to dim on device list and group list into Dimming Interface.

 Click speed+ under dynamic mode.

 Click speed- under dynamic mode.

 Sunset mode: Gradually OFF within 10 minutes.


 Good night mode: Gradually OFF within 1 minute.

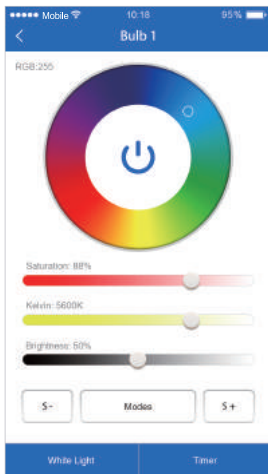

7 Amazon echo Voice Control

Click left top "☰" icon on the home page

Then click "amazon echo" to check detailed instructions

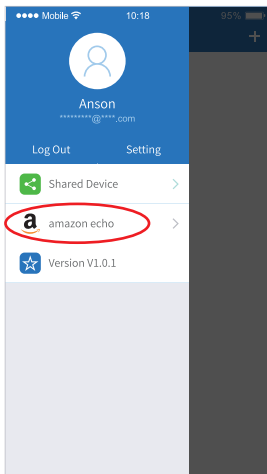

8 Sharing Device

Share the device to friends, Let your friends can control this device.

1. Click the left top "☰" icon on the home page.
2. Click "👤 Shared Device" to My sharing, then click **"Add sharing"**
(Note: the receiving sharing device cannot be shared again).
3. Click "👤 Jack jack@milght.com" to edit sharing, slide to left to delete sharing.

