

MODEL:C4

LED four-channel low-voltage monochromatic light controller

Product Introduction:

This controller can be used in low voltage and constant pressure LED products, one positive electrode, four negative electrode. In order to achieve the effect control of different ways to achieve super dazzling dynamic effect, widely used in billboards, light boxes, shop, stage and other commercial situations

Technical Parameters:

Input Voltage: 5v/12V / 24V

Output Voltage: 5V/12V / 24V

Product Size: (L x W x H): 90 x 70x 22mm

Color: Black

output: 15A/channel

Total Output: Max30A Weight: 90g

Pattern overview:

Mode 1:1, 2, 3, 4, the road lights are always on

Mode Two: 2, 3, 4, Lights in sequence -- Lights flashing - 4321 in sequence

Mode 3: The lights in route 1 are on all the time and the other three are off

Mode 4: The lights of route 2 are on all the time and the other three are off

Mode 5: The lights in route 3 are on all the time and the other three are off

Mode 6: The lights in route 4 are on all the time and the other three are off

Mode 7: Lights of route 1 are on all the time. Lights of route 2, route 3, and route 4 are on successively

Mode 8: Route 4 lights on all the time Route 3, route 2, and route 1 lights on successively

Mode 9: Lights 1 and 4 stay on Lights 2 and 3 flash

Mode 10: Lights 2 and 3 are on all the time Lights 1 and 4 are flashing

Mode eleven: 1, 2, 3, 4 lights synchronized breathing fade and brighten

Mode 12:1, 2, 3, 4 lights in order to light cycle

Mode 13:1, 2, 3, 4 lights pulsate and flicker synchronously

Warning:

1Please confirm the power is correct.


2Never connect two wires directly incase of short circuit.

3Please confirm the lead wire is correct.

4Warranty of this product is oneear, but exclude the artificial situationf damaged or overload working.



External Dimension

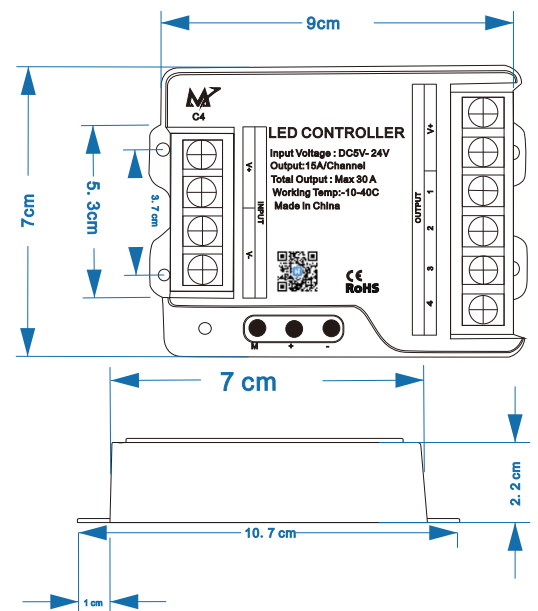

Wiring diagram

