


LT-3060-PWM10V LED Dimming Signal Converter

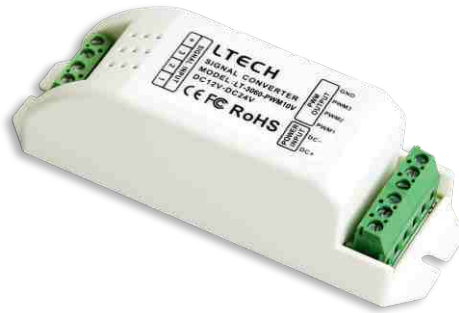

LT-3060-PWM10V is a high performance dimming signal converter, to convert power PWM or 0-10V PWM convert to 10V PWM dimming signal. By using this product, one dimming control system could control multiple drivers or LED lamps in different dimming signal.

1. Product parameter

LT-3060-PWM10V	
Working voltage	DC12V~DC24V
Signal input	PWM x3CH(compatible with CV/CC Power PWM and Signal PWM)
Signal Output	10V PWM x3CH
Dimming range	0~100%
Working temperature	-30°C~55°C
Product size	L121×W39×H39(mm)
Package size	L123×W42×H42(mm)
Weight(G.W)	80G

2. Conjunction Diagram

PWM Input

Connect to the LED dimmer or LED driver with PWM signal output

10V Output

Connect to LED Lamps or Driving Device with 10V PWM signal

